

QUALIFIED BY THE BERRIEN COUNTY SURVEY PEER GROUP AS THE OFFICIAL CORNER UNDER MICHIGAN PUBLIC ACT 345 OF 1990

9-9- RECORDED

1530

BERRIEN COUNTY REMONUMENTATION
LAND CORNER RECORDATION CERTIFICATE
 Filing Requirement of Act 74, Mich. P.A. 1970

BERNICE TRETHERWAY
 REGISTER OF DEEDS
 BERRIEN COUNTY, MICHIGAN

N
 E
 2372935.650 97105.774

of corners in


Located In:	Corner Code #
Berrien (County)	
Public Land Survey	T 8S R19W G-9
	T R
	T R
	T R
1. Property Controlling in Section	S T R
	S T R
2. Miscellaneous Property in Sec.	S T R
	S T R

10/27/98 111#4092 A44
 CORNER \$7.00
 10/27/98 111#4092 A44
 Register of Deeds Stamp & File Number STATE REMUNTEL \$2.00

1. Lot No. _____, Recorded Plat _____
 2. Private Claims _____

V. J. Strebs, in a field survey on May 12, 1998 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found is expressed below:

NOTE: Not more than 2 corners, all in the same town and range, may be recorded on this certificate.

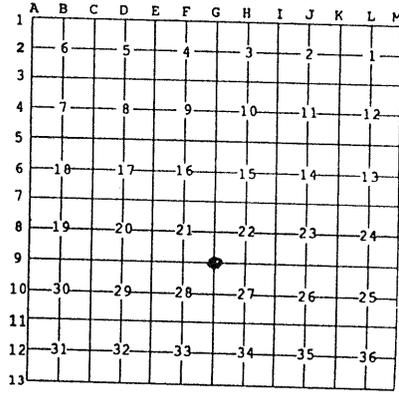

1. Description of original monument and accessories and/or subsequent restoration:


- FEB 13, 1830 LUCIUS LYON DS; SOUTH BETWEEN SECTION S21 & 22 MEASURED 51.93 CHAINS TO NORTH BOUNDARY OF INDIANA 11 CHAINS EAST OF 16TH MILE TREE, SET POST, 15" BEECH N28°E 14 LINKS; 8" BEECH N81°W 35 LINKS.
- SEPT 6, 7, 8 & 9, 1886 ALBERT L. DREW, COUNTY SURVEYOR, STONE WITH SMALL ONES; 14" WALNUT N57°E 118 LINKS (77.88'); 11 CHAINS EAST OF 16TH MILE CORNER (STONE).

2. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

FOUND 1/2" REBAR.

3. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

SET 1" X 3 FT IRON PIPE W/B.C.R.P. BRASS CAP IN MONUMENT BOX; WIT TAG IN 14" WALNUT N55°E 75.00'; WIT TAG IN 8" WALNUT N35°E 17.81'; WIT TAG IN 6" WALNUT N50°W 25.32'; WIT TAG IN 12" CHERRY S40°W 26.41'.
 ACCEPTED AS A CAREFUL AND FAITHFUL PERPETUATION OF THE POSITION OF THE ORIGINAL CORNER.

Signed by 
 Surveyor's Michigan License No. 26469



Date 7-9-98

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN 28, 1971
 REVISED MAY 14, 1975
 REVISED JAN, 1983
 REVISED OCT., 1985