ATTIFIED BY THE BERRIEN COUNTY SURVEY PEER GROUP AS THE FFICIAL CORNER UNDER MICHIGAN PUBLIC ACT 345 OF 1990

4-21-98

For corners in

RECORDED

~~1630~~ 1544

BERRIEN COUNTY REMONUMENTATION LAND CORNER RECORDATION CERTIFICATE

Filing Requirement of Act 74, Mich. P.A. 1970

98 OCT 27 PM 1:06
BERNICE TRETHEWAY
REGISTER OF DEEDS
BERRIEN COUNTY, MICHIGAN

Berrien (County) Located In: Corner Code #

1. Public Land Survey		T 8S R19W	F-9
		T___ R___	
		T___ R___	
		T___ R___	
2. Property Controlling in Section	S___	T___ R___	
	S___	T___ R___	
3. Miscellaneous Property in Sec.	S___	T___ R___	
	S___	T___ R___	

N 237295.986 E 94449.997

10/27/98 111#4092 A44
CORNER $7.00
10/27/98 111#4092 A44
STATE REMON FEE $2.00

Register of Deeds Stamp & File Number

4. Lot No. _____ , Recorded Plat _____
5. Private Claims _____

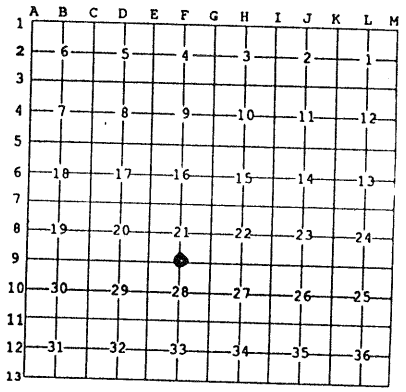

I, V. J. Strebs, in a field survey on May 12, 1998 do hereby state that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and /or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, recovered, found as expressed below:

NOTE: **Not more than 2 corners, all in the same town and range, may be recorded on this certificate.**

A. Description of original monument and accessories and/or subsequent restoration:

NOT SET IN ORIGINAL SURVEYS.

JUNE 19, 1968 D.M. DREHER SET 1 ¼" X 2' IRON PIPE. (NO WITNESSES).

B. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

FOUND ¾" IRON INSIDE 1¼" IRON PIPE.

C. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

SET 1" X 3 FT IRON PIPE IN MONUMENT BOX; WIT TAG IN R.R. TIE FENCE POST N55°W 35.60'; WIT TAG IN 18" WILLOW S75°W 51.52'; WIT TAG IN 12" WILLOW S80°W 65.37'; WIT TAG IN 24" TRIPLE WILLOW S85°W 85.04'.

THIS POSITION NOT ESTABLISHED BY ORIGINAL GOVERNMENT SURVEYORS. THIS MONUMENT IS ACCEPTED AS THE BEST AVAILABLE EVIDENCE OF THE POSITION OF THE CORNER.

Signed by _____ Date 7-9-98
Surveyor's Michigan License No. 26469

STATE OF MICHIGAN
V. J. STREBS
PROFESSIONAL SURVEYOR
No. 26469
LICENSED PROFESSIONAL SURVEYOR

FORM APPROVED BY MICHIGAN STATE BOARD OF PROFESSIONAL SURVEYORS, JAN. 28, 1971
REVISED MAY 14, 1975
REVISED JAN., 1983
REVISED OCT., 1995

N:\HOMEPAGE\MONUMENTS\BERRIEN\CRCNF-9.DOC