

G-1
H-9 = 1502

1545

DEC 28 2 17 PM '93 BERRIEN COUNTY REMONUMENTATION PROGRAM

LAND CORNER RECORDATION CERTIFICATE 12/28/93
Filing Requirement of Act 74, Mich. P.A. 1970

For corners in Berrien (County)
Berrien County, Michigan

111H5115 A33

CORNER \$7.00
111H5115 A33
STATE REMON FEE \$2.00

12/28/93

N
2372713.027 E
159508.734

Register of Deeds Stamp & File Number

- 1. Public Land Survey T 8 S R 17 W. G-9 H-9
- 2. Property Controlling in Section S T R
- 3. Miscellaneous Property in Sec. S T R

- 4. Lot No. _____, Recorded Plat _____
- 5. Private Claims _____

I, R.L. Harner, in a field survey on November 11, 1993, do hereby certify that under requirements of P.A. 74, Michigan P.A. of 1970, the corner points mentioned in lines 1 and 2 above were in conformance with regulations and rules therefore as required in the current manual of survey instructions of the United States Department of the Interior, Bureau of Land Management or by a decree of a Court of Law and/or that the corner points mentioned in lines 3, 4 and 5 above were in conformance with the rules of the Michigan Board of Land Surveyors or by a Decree of a Court of Law; established, re-established, monumented, re-monumented, recovered, found as expressed below:

NOTE: Not more than 4 corners, all in the same town and range, may be recorded on this certificate.

A. Description of original monument and accessories and/or subsequent restoration:


G-9
No record

H-9
Iron 1.6 ft. East of corner - Berrien County Road Commission - no date
Fence post East 16.2 ft.
Fence post West 16.1 ft.
12" oak N.W. 40.0 ft.
Iron - R.W. Prestine Aug. 1977
Center 36" oak N. 22° W. 40.3 ft.

3. Description of corner evidence found and/or method applied in restoring or reestablishing corner:

G-9
Found stone - recently used by others

H-9
Found 3/4" iron

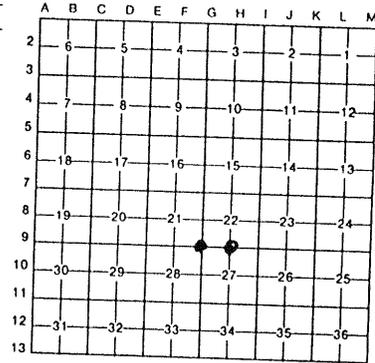

7. Description of monument for corner and accessories established to perpetuate locating the position of the corner:

G-9
Removed stone - set concrete monument with brass cap
P.K. nail in 12" maple N. 35° E. 23.50 ft.
P.K. Nail in twin ash N. 10° E. 8.70 ft.
P.K. nail in 20" maple S. 40° W. 15.25 ft.
P.K. nail in 12" maple S. 65° E. 27.73 ft.

H-9
Set concrete monument with brass cap
P.K. nail in P.P. West 29.53 ft.
P.K. nail in 40" oak N. 22° W. 39.73 ft.
N.E. corner of brick wall S. 50° W. 60.10 ft.
P.K. nail in R.R. tie post East 24.40 ft.

igned by [Signature]
urveyor's Michigan License No. 22436

Date December 28, 1993