

CORNER I.D. # 1755

CORNER RECORD ST. JOSEPH COUNTY, IN

OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS
227 W. JEFFERSON BLVD.
SOUTH BEND, IN 46601 PHONE: (574)235-9631


DATE: 04/30/13
PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.
FIELD CREW: MICHAEL LEWANDOWSKI, JAMES McPHAIL

PENN TOWNSHIP

N=2316911.986 E=217653.331





NOT TO SCALE

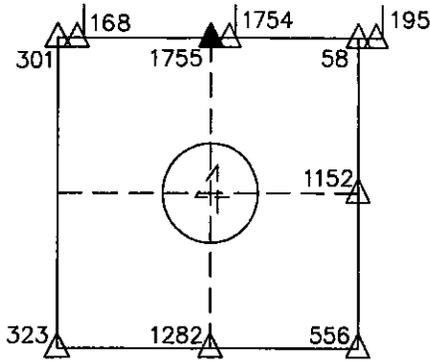

SEC. 4, T36N, R4E

SURFACE MARK: SET HARRISON MONUMENT
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

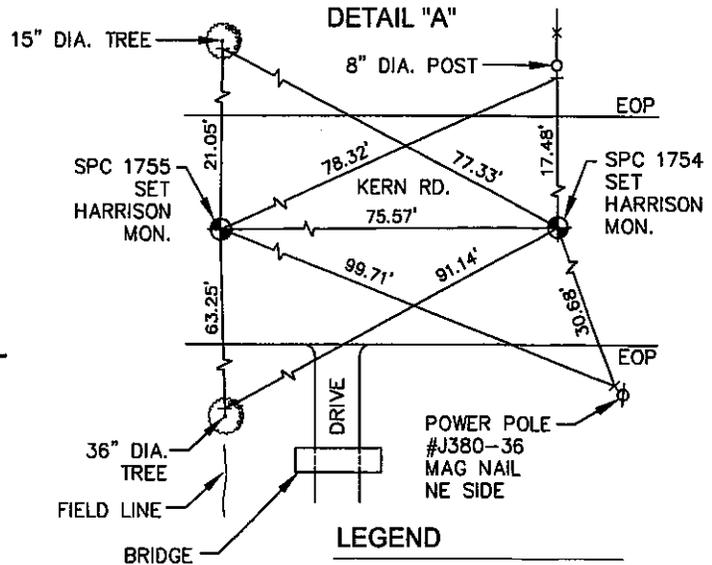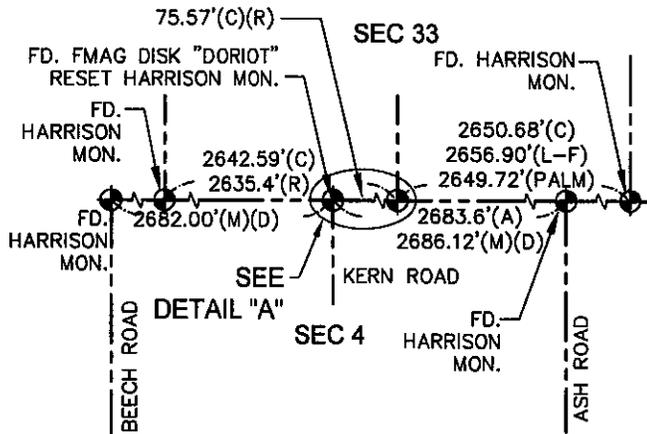

LEGEND

- SECTION CORNER
- (A) 1857 SURVEY
- (C) CALCULATED
- (D) DORIOT SURVEY
- (M) MEASURED
- (R) RECORD 1874
- (L-F) LANG-FEENEY
- (PALM) PALM SURVEY
- FD. FOUND
- EOP EDGE OF PAVEMENT
- MON. MONUMENT
- MAG NAIL IN POWER POLE
- MAG NAIL IN FENCE POST
- MAG NAIL IN TREE

SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, IN 1857 THE SUBJECT CORNER WAS ESTABLISHED. BLAKE DORIOT PERFORMED A SURVEY IN 2008 (INSTR. #0920368) THAT CALLS FOR AN IRON PIPE AS BEING FOUND AT SAID CORNER. WHILE CONDUCTING THE PRESENT SURVEY A MAG/NAIL WITH TAG DORIOT WAS FOUND AND HELD.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

MICHAEL J. ROZYCKI, P.L.S.
PROFESSIONAL LAND SURVEYOR #LS20500010
STATE of INDIANA
ABONMARCHE CONSULTANTS, INC.

5/9/13
DATE

