

CORNER RECORD ST. JOSEPH COUNTY, IN

CORNER I.D. # 1756



OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS
227 W. JEFFERSON BLVD.
SOUTH BEND, IN 46601 PHONE: (574)235-9631
DATE: 04/30/13
PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.
FIELD CREW: MICHAEL LEWANDOWSKI, JAMES McPHAIL

MADISON TOWNSHIP
N=2298503.074 E=204503.351

NOT TO SCALE

SEC. 24, T36N, R3E

SURFACE MARK: HARRISON MONUMENT SET
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

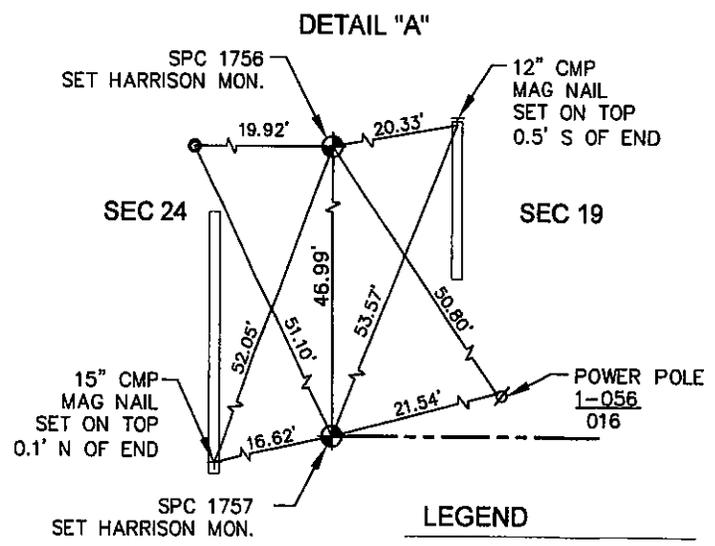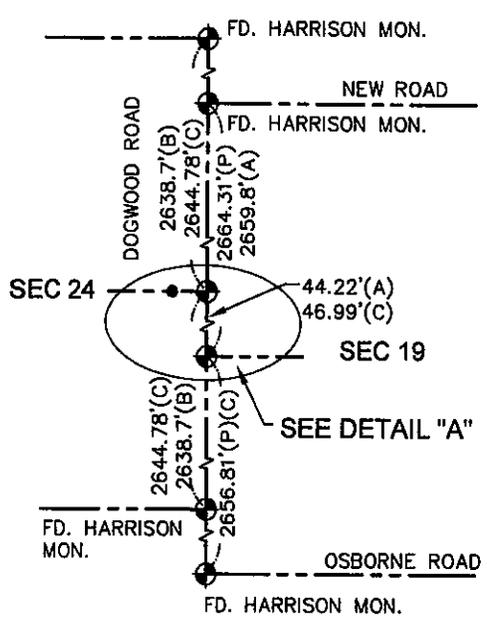

- LEGEND**
- ◆ SECTION CORNER
 - (A) 1867 SURVEY
 - (B) 1875 SURVEY
 - (C) CALCULATED
 - (P) 1994 SURVEY
 - MON. MONUMENT
 - FOUND CAPPED IRON "LS#880041"
 - ⊥ MAG NAIL
 - ⊗ POWER POLE

SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, NO MONUMENT OR WITNESS POINTS EXIST FOR THE SUBJECT CORNER. THE WEST QUARTER CORNER OF SECTION 24 AND AN IRON PIPE WITH CAP (LS#880041) FOUND ON THE EAST/WEST CENTERLINE OF SECTION 24 WERE HELD. SAID POINTS WERE PROJECTED TO INTERSECT THE EAST LINE OF SECTION 24. THIS SOLUTION SEEMED TO AGREE WITH THE 1875 NOTES SHOWING AN EVEN SPLIT.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

Michael J. Rozycki
MICHAEL J. ROZYCKI, P.L.S.
PROFESSIONAL LAND SURVEYOR #LS20500010
STATE of INDIANA
ABONMARCHE CONSULTANTS, INC.

5/2/13
DATE

