

CORNER I.D. # 1757

# CORNER RECORD ST. JOSEPH COUNTY, IN


OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS  
227 W. JEFFERSON BLVD.  
SOUTH BEND, IN 46601 PHONE: (574)235-9631

DATE: 04/30/13  
PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.  
FIELD CREW: MICHAEL LEWANDOWSKI, JAMES McPHAIL

## MADISON TOWNSHIP



N=2298456.081 E=204503.268

NOT TO  
SCALE

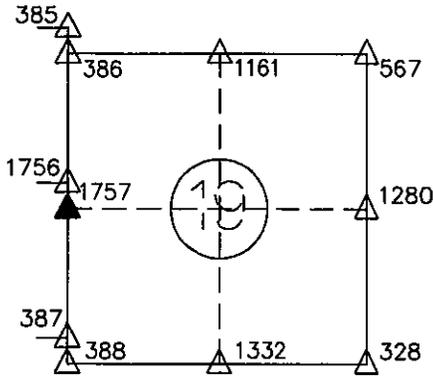

### SEC. 19, T36N, R4E

SURFACE MARK: SET HARRISON MONUMENT  
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

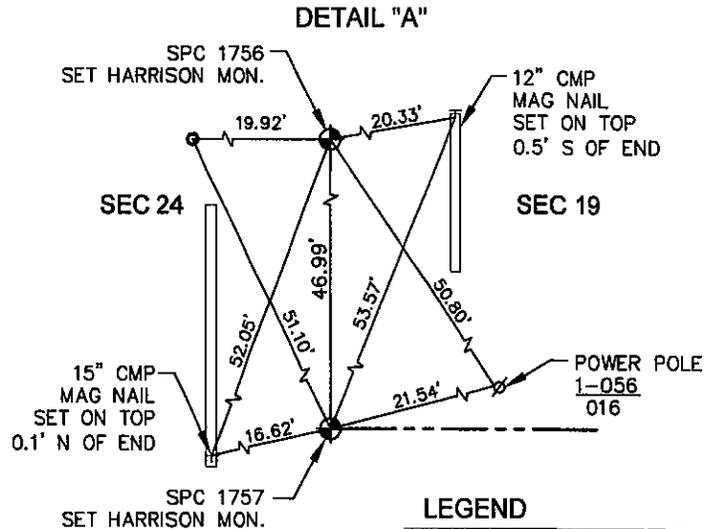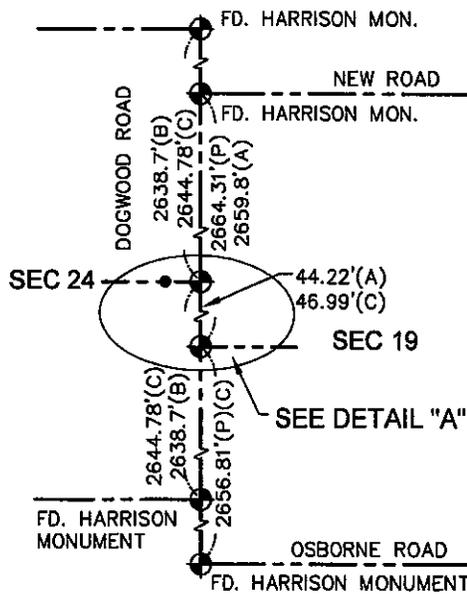

#### LEGEND

- ⊙ SECTION CORNER
- (A) 1867 SURVEY
- (B) 1875 SURVEY
- (C) CALCULATED
- (P) 1994 SURVEY
- MON. MONUMENT
- FOUND CAPPED IRON "LS#880041"
- ⊢ MAG NAIL
- ⊕ POWER POLE

### SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, A STAKE WITH WITNESS TREES WERE CALLED FOR AT THE SUBJECT CORNER. THESE POINTS WERE NOT FOUND AT THE TIME OF SURVEY. THE COUNTY RECORDS DID HAVE A RECORD DISTANCE FOR THE WEST LINE OF THE SOUTHWEST QUARTER TO BE 2656.81'. USING THIS RECORD DISTANCE SEEMED TO AGREE WITH OCCUPATION AND WAS HELD.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

5/2/13  
DATE

MICHAEL J. ROZYCKI, P.L.S.  
PROFESSIONAL LAND SURVEYOR #LS20500010  
STATE OF INDIANA  
ABONMARCHE CONSULTANTS, INC.

