

CORNER I.D. # 1794

# CORNER RECORD

## ST. JOSEPH COUNTY, IN




OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS  
227 W. JEFFERSON BLVD.  
SOUTH BEND, IN 46601 PHONE (574)235-9631

DATE: 10/31/2012  
PREPARED BY: JOSEPH M. PIETRZAK, PLS  
FIELD CREW: DOUGLAS KNELLER

GREENE TOWNSHIP

N=2303958.143 E=120049.446

HARRISON MON. SET AT THE  
W. 1/4 SEC.16, T36N, R1E

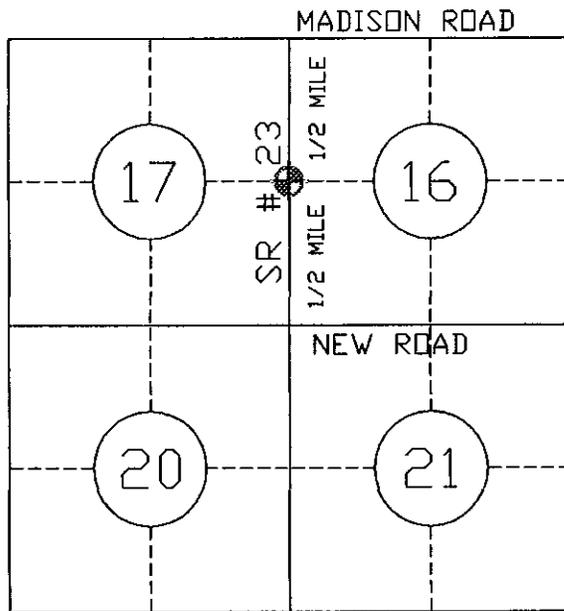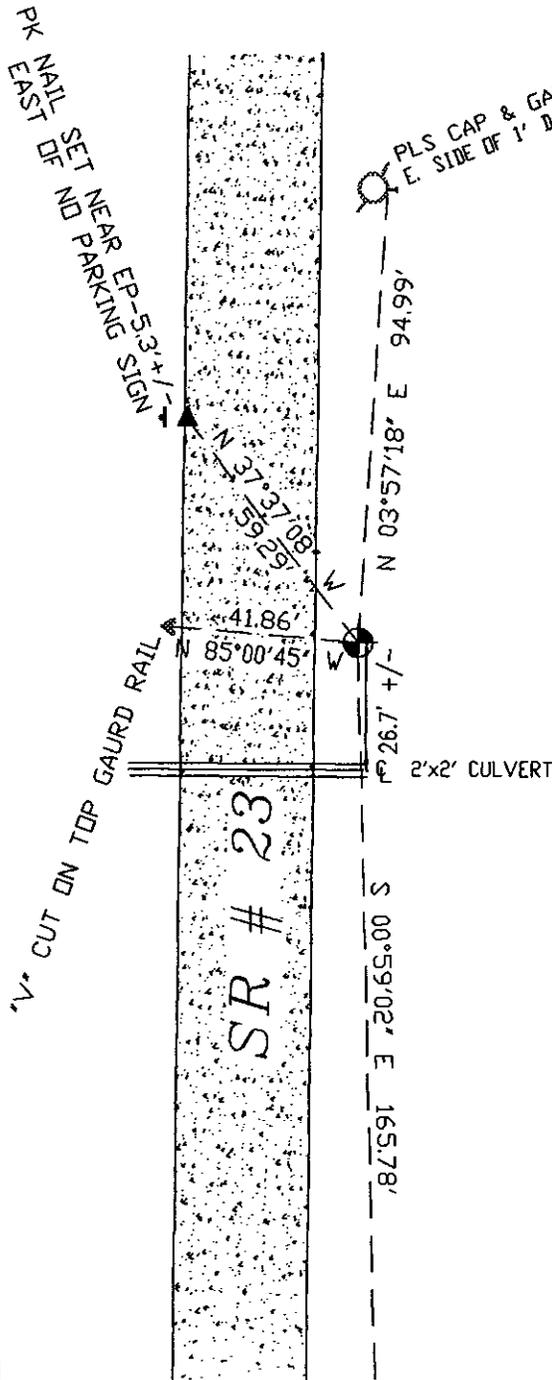

### SURVEYORS REPORT

PLS CAP & GALV. NAIL SET IN  
W. SIDE OF 1' DIA. PWR. POLE #790/920

WE SET A MONUMENT AS FOLLOWS:  
THE WEST QUARTER CORNER OF SECTION 16 CORNER WAS NOT SET AT THE TIME OF THE ORIGINAL GOVERNMENT SURVEY. WE USED THE HARRISON MONUMENTS FOUND AT THE NORTHWEST AND SOUTHWEST CORNERS OF SECTION 16. WE THEN SET OUR HARRISON MONUMENT ON LINE BETWEEN, AND EQUIDISTANT FROM SAID FOUND HARRISON MONUMENTS FOUND AT THE NW AND SW CORNERS OF SECTION

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE THE RESULT OF REAL TIME KINEMATIC (RTK) OBSERVATIONS ORIGINATING FROM A NETWORK OF PERMANENT BASE STATIONS MANAGED BY POSITIONING SOLUTIONS WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED LEAST SQUARES ADJUSTED SURVEY IGS08(EPOCH=01-01-2010(2010.000)) AND POSITIONS WERE TRANSFORMED TO NORTH AMERICAN DATUM (NAD) 83 (2011 ADJUSTMENT) COORDINATE VALUES, IN EAST ZONE (1302). THIS SURVEY MEETS OR EXCEEDS RPA REQUIREMENTS OF AN SUBURBAN SURVEY (PER IAC 865 1-12-7). GRID AND GEODESIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

*Joseph M. Pietrzak*

JOSEPH M. PIETRZAK PLS.  
REG. LAND SURVEYOR #29600024  
STATE OF INDIANA  
PIETRZAK LAND SURVEYING

11-19-2012 SURV\WORK\2012\2012005\_witness.dwg

