

CORNER I.D. # 1809

# CORNER RECORD ST. JOSEPH COUNTY, IN

OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS  
227 W. JEFFERSON BLVD.

SOUTH BEND, IN 46601 PHONE: (574)235-9631

DATE: 08/15/14

PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.


FIELD CREW: MICHAEL LEWANDOWSKI & CAMERON BERON

## PORTAGE TOWNSHIP

N=2330130.998



E=172784.963

NOT TO  
SCALE



### SEC. 19, T37N, R3E

SURFACE MARK: SET HARRISON MONUMENT  
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

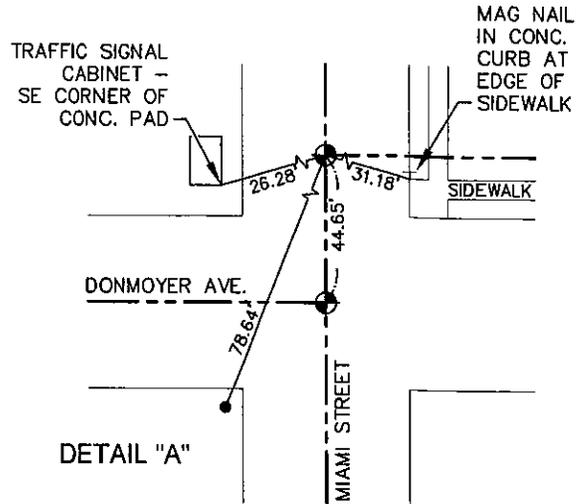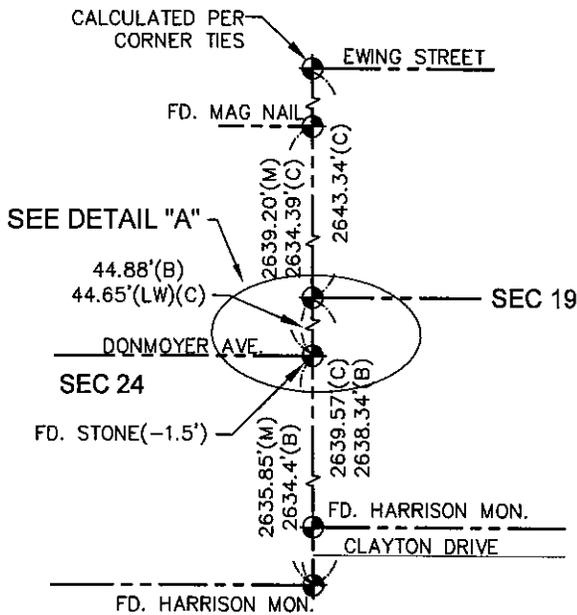

#### LEGEND

- SECTION CORNER
- (B) RECORD (1861)
- (C) CALCULATED
- (D) RECORD (1885)
- (LW) L. WITUCKI
- (M) MEASURED
- MON. MONUMENT
- FD. FOUND
- CONC. CONCRETE
- < MAG NAIL
- ⊗ MAG NAIL IN POWER POLE
- SET 5/8" REBAR W/ ABONMARCHE CONTROL CAP (WITNESS)

### SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, NO MONUMENT OR WITNESS POINTS WERE CALLED FOR. A STONE WAS FOUND AT THE EAST QUARTER CORNER OF SECTION 24. THE WEST QUARTER CORNER OF SECTION 19 WAS CALCULATED AT THE RECORD FALLING SHOWN IN THE FIELD NOTES OF WITUCKI.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

MICHAEL J. ROZYCKI, P.L.S.  
PROFESSIONAL LAND SURVEYOR #LS20500010  
STATE OF INDIANA  
ABONMARCHE CONSULTANTS, INC.

9/8/14  
DATE

