

CORNER I.D. #1632

CORNER RECORD ST. JOSEPH COUNTY, IN

OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS
227 W. JEFFERSON BLVD.
SOUTH BEND, IN 46601 PHONE: (574)235-9631


DATE: 01/13/09
PREPARED BY: AARON W. BLANK, L.S.
FIELD CREW: STEVE KARACSON, BRIAN BARBER

CLAY TOWNSHIP

N=2356548.6264



E=185832.8117

NOT TO SCALE

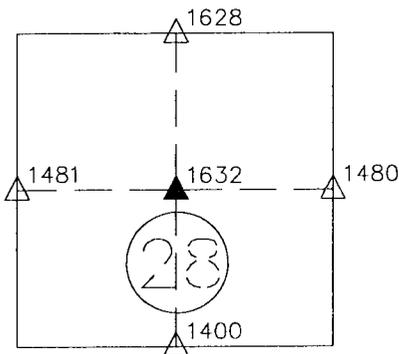

SEC. 28, T38N, R3E

SURFACE MARK: HARRISON MONUMENT MARKED "SECTION CENTER"
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

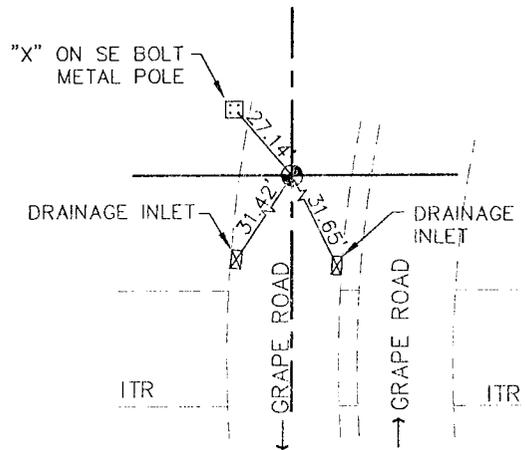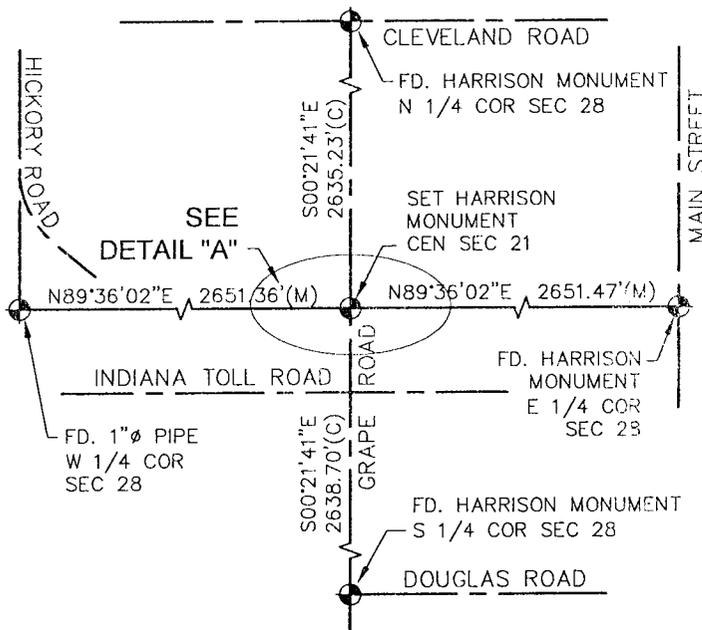

DETAIL "A"
WITNESS POINTS

LEGEND

- | | |
|----------------|-----------------------|
| (C) CALCULATED | ∅ DIAMETER |
| (M) MEASURED | ⊙ SECTION CORNER |
| COR CORNER | ITR INDIANA TOLL ROAD |
| CEN CENTER | ☒ DRAINAGE INLET |
| | ☒ STRAIN POLE |

SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER DOSSIER, THE EAST-WEST CENTERLINE OF THE SECTION WAS SURVEYED IN 1860. NO RECORD OF AN ORIGINAL MONUMENT NOT PERPETUATION WERE FOUND THIS SURVEY. THE POSITION OF THE SUBJECT CORNER WAS DETERMINED TO LIE AT THE INTERSECTION OF THE HALF SECTION LINES. THE UNCERTAINTY OF THIS POSITION SOLUTION IS UNKNOWN.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1301), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

Aaron Blank

AARON W. BLANK
REG. LAND SURVEYOR NO. 20200020
STATE OF INDIANA
ABONMARCHE CONSULTANTS OF INDIANA, LLC

01/02/09

DATE

