

CORNER RECORD ST. JOSEPH COUNTY, IN

CORNER I.D. # 1765

OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS
227 W. JEFFERSON BLVD.
SOUTH BEND, IN 46601 PHONE: (574)235-9631

DATE: 04/30/13
PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.
FIELD CREW: MICHAEL LEWANDOWSKI, JAMES McPHAIL

UNION TOWNSHIP

N=2298469.426



E=172725.333



NOT TO
SCALE

SEC. 19, T36N, R3E

SURFACE MARK: SET HARRISON MONUMENT
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

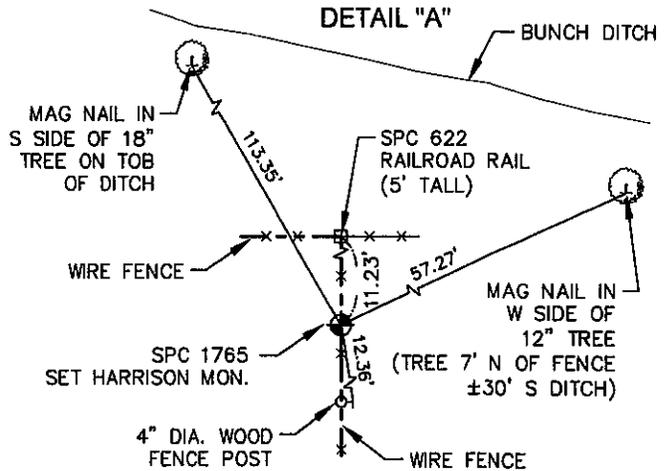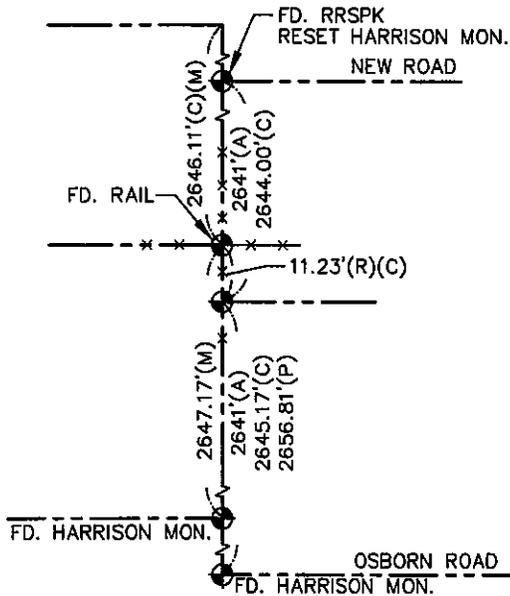

LEGEND

Symbol	Description	Code	Meaning
⊕	SECTION CORNER	C/L	CENTERLINE
⊙	MAG NAIL SET IN FENCE POST	(A)	1859 SURVEY
⊙	MAG NAIL/CAP SET IN TREE	(C)	CALCULATED
⊙		(M)	MEASURED
⊙		(P)	1994 SURVEY
⊙		(R)	RECORD
—x—x—	FENCE		
⊕	RRSPK RAILROAD SPIKE		

SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, IN 1859 A POST WAS FOUND. THIS POINT WAS NOT FOUND, ALSO IN THE 1891 NOTES A STONE WAS CALLED FOR. REMAINS OF THE STONE WERE THOUGHT TO HAVE BEEN RECOVERED IN THE GENERAL AREA OF THE CALCULATED POINT, BEING THE RECORD FALLING SOUTH FROM THE EAST QUARTER CORNER OF SECTION 24.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS),

1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

Michael J. Rozycki

5/2/13

MICHAEL J. ROZYCKI, P.L.S.
PROFESSIONAL LAND SURVEYOR #LS20500010
STATE OF INDIANA
ABONMARCHE CONSULTANTS, INC.

DATE

