

CORNER RECORD ST. JOSEPH COUNTY, IN

CORNER I.D. # 1801

OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS
227 W. JEFFERSON BLVD.

SOUTH BEND, IN 46601 PHONE: (574)235-9631

DATE: 08/15/14

PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.

FIELD CREW: MICHAEL LEWANDOWSKI & CAMERON BERON

OLIVE TOWNSHIP

N=2340890.824



E=109384.542



NOT TO
SCALE

SEC. 7, T37N, R1E

SURFACE MARK: 1" STEEL BAR IN CONCRETE
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

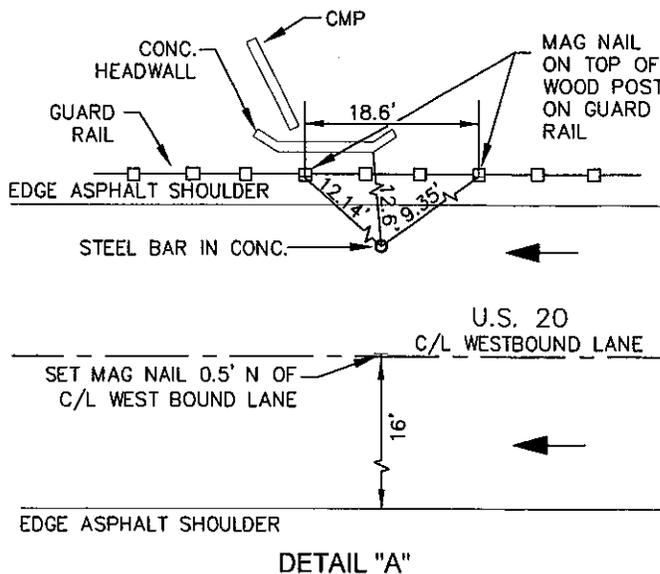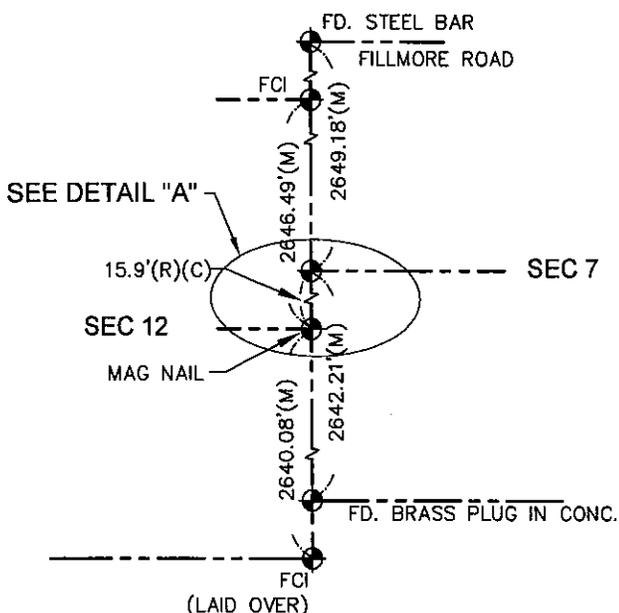

LEGEND

- ◆ SECTION CORNER
- (C) CALCULATED
- (M) MEASURED
- (R) RECORD
- STEEL BAR
- × MAG NAIL
- FCI FOUND CAPPED IRON
- FD. FOUND
- CONC. CONCRETE
- C/L CENTERLINE
- CMP CORRUGATED METAL PIPE

SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, SAID POINT WAS TO BE 43.3± FEET NORTHERLY OF THE CENTERLINE OF STATE ROAD #2. A 1 INCH STEEL BAR IN CONCRETE WAS LOCATED AND HELD AT SAID POINT.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

Michael J. Rozycki

9/8/14

MICHAEL J. ROZYCKI, P.L.S.
PROFESSIONAL LAND SURVEYOR #LS20500010
STATE OF INDIANA
ABONMARCHE CONSULTANTS, INC.

DATE

