

CORNER RECORD ST. JOSEPH COUNTY, IN

CORNER I.D. # 1805

OFFICE OF THE COUNTY SURVEYOR, JOHN McNAMARA, PLS
227 W. JEFFERSON BLVD.
SOUTH BEND, IN 46601 PHONE: (574)235-9631

DATE: 08/15/14
PREPARED BY: MICHAEL J. ROZYCKI, P.L.S.
FIELD CREW: MICHAEL LEWANDOWSKI & CAMERON BERON

PORTAGE TOWNSHIP



N=2335473.837 E=172784.386



NOT TO
SCALE

SEC. 18, T37N, R3E

SURFACE MARK: SET HARRISON MONUMENT
ALL DISTANCE UNITS ARE U.S. SURVEY FEET

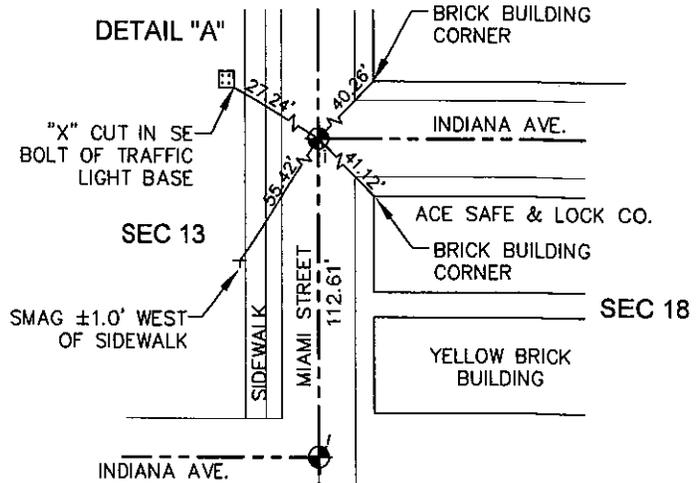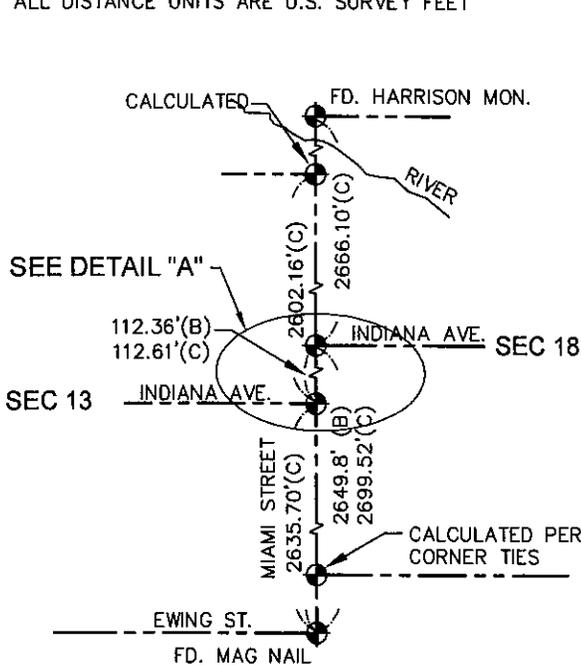

LEGEND

- ⊕ SECTION CORNER
- (B) 1860
- (C) CALCULATED
- (M) MEASURED
- (R) RECORD
- ⊠ TRAFFIC LIGHT BASE
- FIP FOUND IRON PIPE
- FCI FOUND CAPPED IRON
- MON. MONUMENT
- FD. FOUND
- ⊕ MAG NAIL

SURVEYOR'S REPORT

ACCORDING TO THE COUNTY CORNER RECORDS, BEARING TREES AND A POST WERE CALLED FOR, BUT NEITHER WERE FOUND. EXISTING MONUMENTATION WAS FOUND AND HELD IN OAK PARK AND LEER'S 2ND ADDITION TO ESTABLISH SAID POINT.

THE MEASURED COORDINATE VALUES AND DISTANCES SHOWN ON THE PLAT OF SURVEY ARE A RESULT OF REAL TIME KINEMATIC OBSERVATIONS ORIGINATED FROM A PERMANENT BASE STATION WHICH POSITION IS BASED UPON A MINIMALLY CONSTRAINED, LEAST SQUARES ADJUSTED SURVEY. SAID SURVEY CONTAINED NATIONAL GEODETIC SURVEY (NGS), 1ST ORDER HORIZONTAL (OR BETTER) CONTROL MONUMENTS: DG9007, ME3288, ME2210, ME0042; UTILIZING THEIR PUBLISHED INDIANA STATE PLANE COORDINATE, EAST ZONE (1302), NORTH AMERICAN DATUM 83 (1997 ADJUSTMENT) COORDINATE VALUES. THIS SURVEY MEETS OR EXCEEDS THE RPA REQUIREMENTS OF A SUBURBAN SURVEY (PER IAC 865 1-12-7).

GRID AND GEODETIC COORDINATES ARE SHOWN TO THREE DECIMAL PLACES TO ENSURE ACCURACY WHEN WORKING WITH THESE NUMBERS. IT IS NOT INTENDED AS A STATEMENT OF RELATIVE POSITIONAL ACCURACY.

Michael J. Rozycki
MICHAEL J. ROZYCKI, P.L.S.
PROFESSIONAL LAND SURVEYOR #LS20500010
STATE OF INDIANA
ABONMARCHE CONSULTANTS, INC.

9/8/14
DATE

